

# Kestrel Evo 'S' VFA

The ever popular VFA variable forward arm is now available in the compact yet powerful Kestrel 'S' range.

Features include integral road lighting, tubular 3 point linkage and power slew with hydraulic breakout.

## Key Features

- 5m reach
- Parallel arm as standard
- Choice of flails, heads and cutter bars
- Power slew
- Debris blower option



Want to know more about  
the Kestrel Evo S VFA range?

Scan the QR code with a smart phone  
or tablet to instantly view the page.





## Product Specification

● Standard ○ Optional — Not Available

Kestrel Evo 'S' VFA	5.0m (16'5")
<b>Tractor requirements</b>	
Minimum horse power	50hp
Minimum weight	3000kg / 6614lbs
<b>Base unit mounting options</b>	
Front mount	—
Mid-mount	—
Rear mount	●
Three point linkage (CAT II)	●
Axle bracket	—
Sub Frame	—
Yoke	—
<b>Overall machine parameters</b>	
Machine weight with head and oil	1180kg / 2601lbs
Capacity of oil tank	160L / 42.3USG
Weight of machine with oil but without head	940kg / 2072lbs
<b>Controls</b>	
Cable Control (CC)	●
Low pressure hydraulics (LPH)	○
Electronic proportional control (EPP)	○
Intelligent control system (ICS)	—
Cable rotor reverse	●
Electronic rotor reverse	—
<b>Hydraulic System</b>	
System capability	54hp
Pump flow rate	88L / 19.4USG
Pump type (Gear / Piston / Helical)	Gear
Pump arrangement (Twin / Tandem Inline)	Twin
Independent hydraulics	●
Oil cooler	○

Kestrel Evo 'S' VFA	5.0m (16'5")
<b>Arm features and main frame</b>	
Forward arm	1200mm / 3'11"
Telescopic arm	—
Telescopic arm stroke	—
Power slew	●
Power slew angle	94°
Gravity breakout protection	—
Hydraulic breakout protection	●
Arm float - manual operation	○
Arm float - electronic operation	○
Head float - manual operation	●
Head float - electronic operation	○
Left hand cutting	○
Right hand cutting	○
Left and right hand cutting	—
<b>Arm attachments available</b>	
Variable track bracket (VTB)	—
Sheartrim cutter bar	○
Pro-Saw	○
Ditch cleaner	—
Rotary head	○
<b>Accessories</b>	
Road lights	●
Debris blower	○
Cab guard kit	●
<b>Cutting heads (For Flail compatibility see page 95)</b>	
1.2m Pro-Trim with 115/150mm roller	○
1.2m Pro-Trim ISMP with 115/150mm roller	○
1.5m Pro-Trim with 115/150mm roller	○



**Low profile tank**  
Aids driver visibility.



**LED road lighting**  
Fitted as standard.



**Powerful 74hp hydraulics**  
For continuous use. Twin pumps with separate oil tank.




**Clear visibility**  
Variable forward reach brings cutting head into drivers view.

## Working Reach

Head used for calcs: 1.2 Pro-Trim

Side Reach Kestrel Evo 'S' VFA 5.0M (16'5")	
A	5.08m / 16'8"
B	4.80m / 15'9"
C	4.94m / 16'2"
D	4.49m / 14'9"
E	5.66m / 18'7"
X	1.35m / 4'5"
Y	1.0m / 3'4"

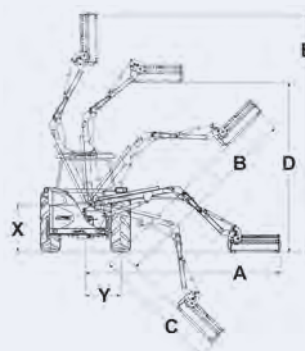

Forward Reach Kestrel Evo 'S' VFA 5.0M (16'5")	
A	5.08m / 16'8"
F	4.96m / 17'8"
G	5.0m / 16'4"
H	1.2m / 3'11"
J	0.56m / 1'10"

