

Kestrel Evo 'E'

The Kestrel Evo 'E' hedge trimmer and verge mower, with a 5m reach and a choice of flail heads or a 1.5m sheartrim cutterbar, is perfect for the farmer who needs professional features and robust design, offering real value for money.

A well designed, and cost effective machine, with mechanical breakout and cable controls as standard, the Kestrel Evo 'E' is the perfect model for small scale farmers and infrequent users. Very popular with dairy farmers who wish to maintain stock boundary hedges and water courses with hassle free operation and economic cost.

A choice of flail heads for control of grass, hedges and light brush. Upgrade options to the Pro-Trim series of cutting head and heavy duty Truecut flail are available.

Key Features

- 5m reach
- Choice of flail heads or 1.5m cutter bar
- Twin pump independent hydraulics
- Cat 11 three point linkage mounted
- Mechanical breakout protection



Want to know more about the Kestrel Evo E range?

Scan the QR code with a smart phone or tablet to instantly view the page.



Product Specification

● Standard ○ Optional — Not Available

Kestrel Evo 'E'	5.0m (16'5")
Tractor requirements	
Minimum horse power	50hp
Minimum weight	3000kg / 6614lbs
Base unit mounting options	
Front mount	—
Mid-mount	—
Rear mount	●
Three point linkage (Cat 11)	●
Axle bracket	—
Overall machine parameters	
Machine weight with head and oil	1020kg / 2249lbs
Capacity of oil tank	160L / 42.3USG
Weight of machine with oil but without head	770kg / 1698lbs
Controls	
Cable Control (CC)	●
Low pressure hydraulics (LPH)	○
Electronic proportional control (EPP)	○
Intelligent control system (ICS)	—
Cable rotor reverse	○
Electronic rotor reverse	○
Hydraulic System	
System capability	45hp
Pump flow rate	74L / 19.5USG
Pump type (Gear / Piston / Helical)	Gear
Pump arrangement (Twin / Tandem Inline)	Twin
Independent hydraulics	●
Oil cooler	○
Accessories	
Road lights	○
Debris blower	○
Cab guard kit	●

Kestrel Evo 'E'	5.0m (16'5")
Arm features and main frame	
Fixed forward arm	—
Folding forward arm	—
Variable folding arm	—
Telescopic arm	—
Telescopic arm stroke	—
Power slew	—
Power slew angle	—
Gravity breakout protection	●
Hydraulic breakout protection	—
Armfloat - manual operation	○
Armfloat - electronic operation	○
Head angle float	●
Left hand cutting	○
Right hand cutting	○
Left and right hand cutting	—
Arm attachments available	
Variable track bracket (VTB)	—
Sheartrim cutter bar	○
Pro-Saw	○
Ditch cleaner	—
Rotary head	—
Cutting heads (For Flail compatibility see page 79)	
1257mm head with 102mm roller	●
1257mm head with 150mm roller	○
1.2m Pro-Trim head with 115mm roller	○
1.2m Pro-Trim head with 150mm roller	○
1.5m Sheartrim cutterbar	○



Mechanical breakout
For machine and operator safety.



Optional oil cooler
Can be fitted in rear panel.




**240° cowl
bracket linkage**
For a greater angle range.

Working Reach

Head used for calcs: 1.2 Pro-Trim

	Kestrel Evo 'E' 5.0m (16'5")
A	5.06m / 16'7"
B	4.97m / 16'4"
C	3.63m / 11'11"
D	4.05m / 13'3"
E	5.98m / 19'7"
X	1.0m / 3'3"
Y	1.34m / 4'7"

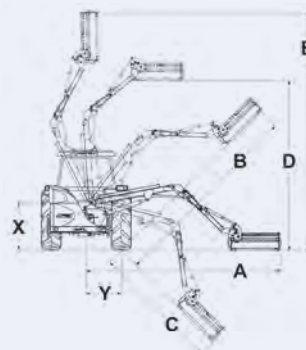

1257LW head
Perfect for smaller light
weight tractors.

