

Turbo Mower Offset



The Turbo Mower Offset range offers operators a choice of cutting widths at cost effective prices.

A well designed and constructed range, the Turbo Mower Offset is built with durability and ease-of-use in mind – a low maintenance machine that is simple to operate.

Key Features

- 1.6m, 2.2m and 2.5m cutting widths
- Three point linkage mounting
- Left or right hand cutting options available
- PTO overrun protection, safety breakaway and double-skin protection
- 132 degrees of head movement
- Vertical and horizontal hydraulic adjustment
- Fuel-efficient, high-performance double spiral rotor
- Cutting height of 30mm - 80mm
- Maximum cutting diameter of 50mm



Want to know more about the Turbo Mower Offset range?

Scan the QR code with a smart phone or tablet to instantly view the page.



Product Specification

● Standard ○ Optional — Not Available

Turbo Mower Offset	160	200	220	220HD	250HD
Working Width	1.6m / 5'3"	2.0m / 6'6"	2.2m / 7'2"	2.2m / 7'2"	2.5m / 8'2"
Weight	610kg 1345lbs	670kg 1477lbs	710kg 1565lbs	1060kg 2310lbs	1260kg 2779lbs
Front Protection	Steel Flap	Steel Flap	Steel Flap	Steel Flap	Steel Flap
Rear Protection	Rubber Flap	Rubber Flap	Rubber Flap	Rubber Flap	Rubber Flap
Linkage	Cat 11	Cat 11	Cat 11	Cat 11 / 111	Cat 11 / 111
PTO Speed (rpm)	540	540	540	540	540
No of Belts	3	3	3	4	5
Front Mount	—	—	—	—	—
No of Flails (Whale Tail)	20	30	34	22	24
Width of Flails	110mm / 4 ³ / ₁₆	110mm / 4 ³ / ₁₆	110mm / 4 ³ / ₁₆	110mm / 4 ³ / ₁₆	135mm / 5 ³ / ₁₆
Power Requirements (min)	50hp	55hp	60hp	90hp	95hp
Cutting Height	30-80mm 1 ¹ / ₁₆ " - 3 ¹ / ₁₆ "	30-80mm 1 ¹ / ₁₆ " - 3 ¹ / ₁₆ "	30-80mm 1 ¹ / ₁₆ " - 3 ¹ / ₁₆ "	30-80mm 1 ¹ / ₁₆ " - 3 ¹ / ₁₆ "	30-80mm 1 ¹ / ₁₆ " - 3 ¹ / ₁₆ "
Roller Size	140mm / 5 ¹ / ₂ "	140mm / 5 ¹ / ₂ "	140mm / 5 ¹ / ₂ "	170mm / 6 ¹¹ / ₁₆ "	170mm / 6 ¹¹ / ₁₆ "

Guarding

Leading edge debris rail and rear rubber flaps.

Parallel linkage


Standard on all models.

Replacable skids

Simple to replace.

Dimensions and Working Reach

	160	200	220	220HD	250HD
A	1.82m / 6'	2.0m / 6'6"	2.44m / 7'9"	2.44m / 7'9"	2.74m / 8'9"
B	0.9m / 3'	0.9m / 3'	0.9m / 3'	1.07m / 3'5"	1.07m / 3'5"
C	0.4m / 1'3"	0.4m / 1'3"	0.4m / 1'3"	0.5m / 1'6"	0.5m / 1'6"
D	0.7m / 2'3"	0.7m / 2'3"	0.7m / 2'3"	0.4m / 1'3"	0.4m / 1'3"
E	1.1m / 3'3"	1.5m / 4'9"	1.9m / 6'2"	2.06m / 6'8"	2.36m / 7'7"
F	2.03m / 6'6"	2.03m / 6'6"	2.03m / 6'6"	2.5m / 8'2"	2.5m / 8'2"
G	2.3m / 7'5"	2.7m / 8'8"	2.9m / 9'5"	3.07m / 10'	3.37m / 11'
H	2.06m / 6'7"	2.06m / 6'7"	2.06m / 6'7"	2.26m / 7'4"	2.26m / 7'4"
I	+90°	+90°	+90°	+90°	+90°
J	-42°	-42°	-42°	-42°	-42°

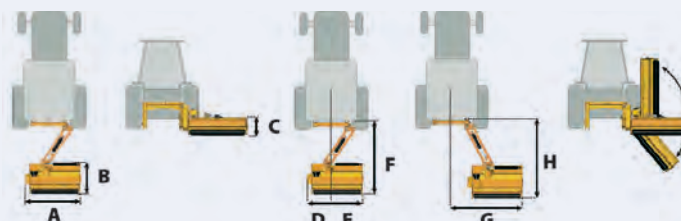

Transport position

Transports within tractor width.